



常州市佳博机械制造有限公司

电 话：0086-519-86133523
传 真：0086-519-86135153
地 址：常州武进前黄运村农场村
邮 箱：bikemotor@czjbmotor.com
网 址：http://www.czjb.com

Changzhou JiaBo Machinery Manufacturing Co.,Ltd.

Tel:0086-519-86511997
Fax:0086-519-86135153
E-mail:bikemotor@czjbmotor.com
Add:Nongchang,Yuncun vill,Qianhuang Town,
Wujin Dist,Changzhou City
Web:http://www.czjb.com

CÔNG TY TNHH CZJB MOTOR (VIỆT NAM)

佳博（越南）有限公司

地址：越南,隆安省,德和县,德和东社,德和一工业区,
第五号路D02-3地块, A厂房二楼、三楼。
Địa chỉ: Tầng 2, Tầng 3, Nhà xưởng A, Lô D02-3 Đường số 5,
Khu Công nghiệp Đức Hòa 1, Xã Đức Hòa Đông, huyện Đức Hòa, t
ỉnh Long An, Việt Nam

CZJB MOTOR AMERICA SERVICE

Contact :Esperanza
Tel: 9493167462
E-mail:service@czjbmotor.com
Address:1500 S Milliken Ave unit i Ontario CA 91761

2025

企业简介

COMPANY PROFILE




Changzhou Jiabo Machinery Manufacturing Co.,Ltd. was established in 2008 as a high-tech company integrating product development, production and sales.

The company mainly produces electric bicycle hub motors, mid-drive motors, torque sensor and industrial ceiling fan motor. We also supply electric bike conversion kit include controller, display,throttle,brake lever,pas and waterproof connected cables.

Our company has experienced product development designers who can develop customized motor products with special requirements in response to the different needs of customers.

Based on the principle of customer consideration and environmental protection, the company uses good raw materials and exquisite production technology to create stable, efficient and durable prod. ucts for customers.

The factory covers an area of more than 15,000 square meters and has an annual production capacity of 800,000 units. The products have passed CCC,CE, ROHS, EMC,SGS,UKCA. and many other international certifications. We have established a complete quality assurance system and passed the ISO9001 quality system certification.

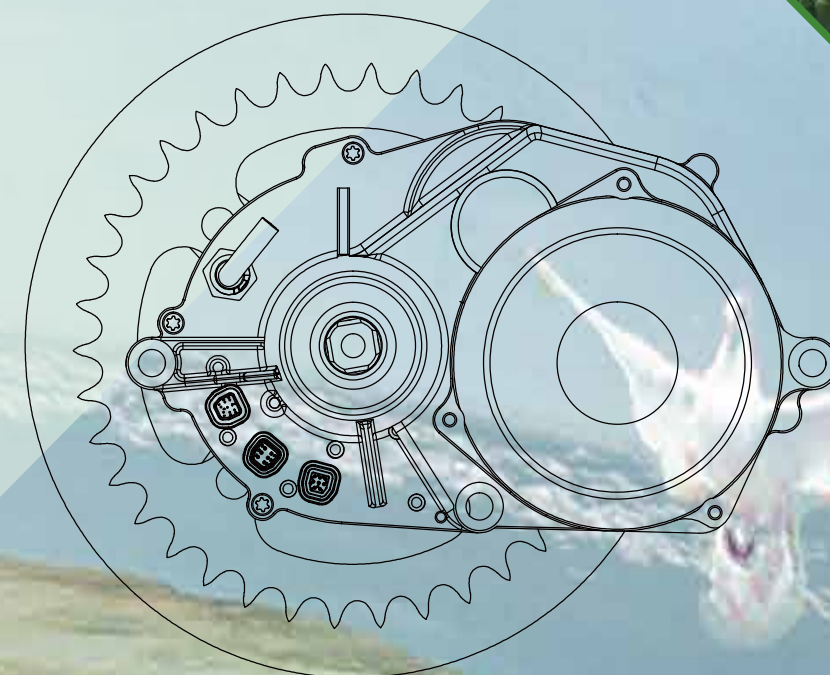

目 录

Contents

MM02中置电机 Mid drive motor-----	01
M09中置代驾车电机-----	02
M10中置电摩电机-----	03



CS500-1三轮车集成驱动-----	04
JBCS-S20差速器-----	05
110DZ无辐条孔-----	06

250w motor for E-city	
IH45H01 内转子电机-----	07
IH45H02 内转子电机-----	08



外转子电机 250w motor for E-city	
75Q-----	09
75T-----	10
75T2-----	11

外转子电机 250w-350w motor for E-city/road	
90Q-----	12
90T皮带轮-----	13
90SZ-----	14



外转子电机 250w-350w motor for E-city/road	
90T2-----	15
90C2-----	16
90H-----	17
90HZ-----	18
90A3X-----	19



外转子电机 350w-500w motor E-city/road/cargo	
110SZ-----	20
105CQ-----	21
105C-----	22
105C2-----	23

目 录

Contents

外转子电机 350w-500w motor E-city/road/cargo	
105CZ-----	24
121TQ-----	25
121T-----	26
121T2-----	27



雪地车电机 350w-1500w motor E-fat

110DZ-----	28
110CQ-----	29
110CS-----	30
110C内置电子锁-----	31
121CZ-----	32
135CZ-----	33
135CZT筒轴电机-----	34



电机 350w-1000w motor E-MTB

135TZ-----	35
205/35-----	36
205/35H2-----	37
205/55-----	38



一体轮电机 wheel hub motor 250w-750w



90/12"-----	39
90/14"-----	40
90/16"-----	41
110/16"-----	42
90/20"-----	43
110/20"-----	44




电机套件 E-bike kit

工业吊扇电机 Industrial Ceiling Fan Motor---	45
电机套件 E-bike kit 250w-1000w-----	46
中轴力矩 Torque sensor-----	47
全自动修车架 EBIKE REPAIR STAND-----	48



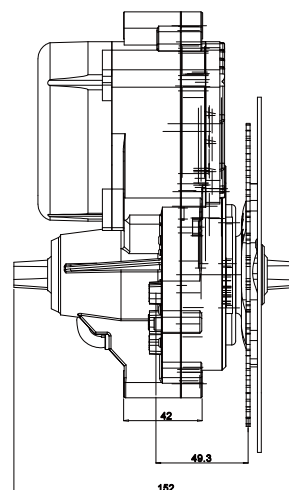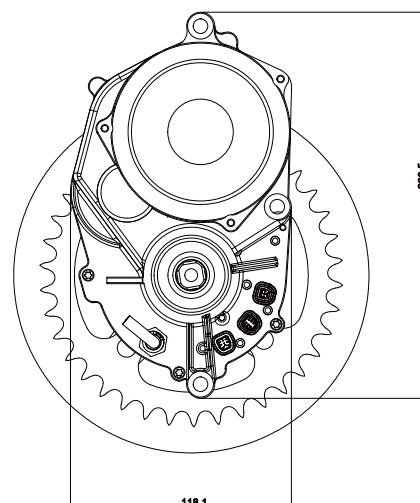

Rated Voltage (V) 额定电压	36/48	Operating Temperature (°C) 工作温度	-20-45
Rated Power (W) 额定功率	350-500	Efficiency (%) 效率	≥ 82
Weight (Kg) 重量	3.82	Color颜色	Black
Reduction Ratio减速比	1:32.58	Noise Grade (dB) 噪音等级	≤ 55db
Torque (N.m) 最大扭矩	150	IP Grade 防水等级	IP65
Rated Speed (RPM) 额定转速	80-100	Salt spray Test Standard (h) 盐雾测试	24/96
Sensor传感器	Speed&torque sensor		

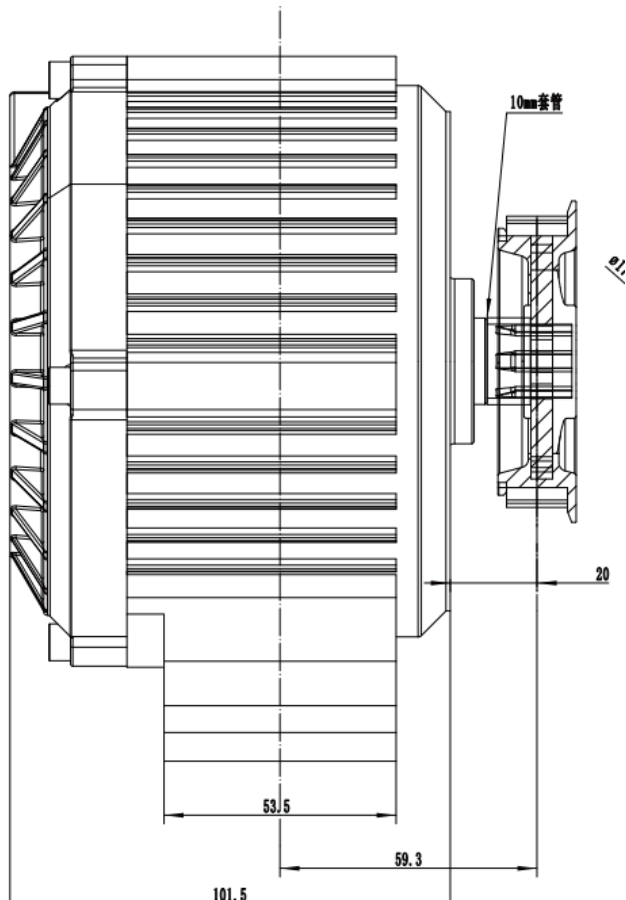


Rated Voltage (V) 额定电压	48	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	800	Efficiency (%) 效率	≥ 82
Weight (Kg) 重量	3.7	Color颜色	Black
Torque (N.m) 最大扭矩	20	Noise Grade (dB) 噪音等级	≤ 55db
Rated Speed (RPM) 额定转速	2100	IP Grade 防水等级	IP67
		Salt spray Test Standard (h) 盐雾测试	24/96





mid drive motor for electric motorcycle中置电摩 M10

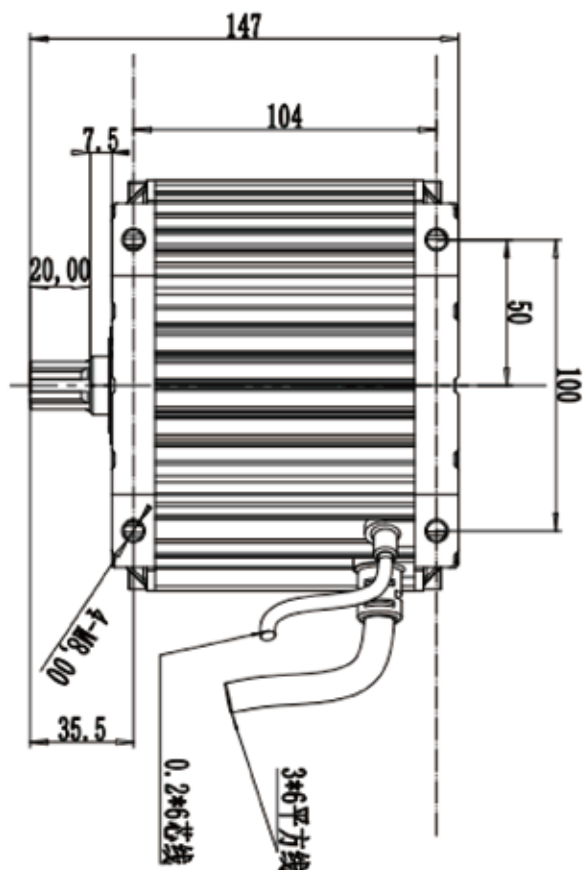

Rated Voltage (V) 额定电压	48	Reduction Ratio减速比	1: 1
Rated Power (W) 额定功率	1200	Max Efficiency (%) 最大效率	≥ 90
Weight (Kg) 重量	6.8	Color颜色	Black
Rated Torque (N.m) 额定扭矩	6	绝缘等级 Insulation Class	F (155 °C)
Peak Torque (N.m) 峰值扭矩	26	IP Grade 防水等级	IP67
Rated Speed (RPM) 额定转速	3800	位置传感器 Position Sensor	MLX编码器 (输出霍尔信号)
Peak Speed (RPM) 峰值转速	2600-4900	温度传感器 Temperature Sensor	PT1000



Rated Voltage (V) 额定电压	48
Rated Power (W) 额定功率	500W/750W
Weight (Kg) 重量	5.25
Reduction Ratio 减速比	1: 18.5
Max Torque (N.m) 最大扭矩	75/90N.m

最新版传动系统将差速器和电机融合成一体，实现了多项优化：

减少系统体积和重量，简化整车厂安装过程。

通过降低能量损失，提高动力传输效率，使得续航里程增加至30%。

该系统更可靠、更耐用，减少了转速和扭矩的波动，为驾驶者带来更加平稳舒适的驾驶体验。

The latest TRI DRIVE FUSION SYSTEM integrates the differential and motor, optimizing performance: reducing size and weight, simplifying assembly.

boosting efficiency to increase range by 30%.




It's more reliable, durable, and provides a smoother, comfortable driving experience with reduced speed and torque fluctuations.



Trike Differential 差速器

JBCS-S20

NEW

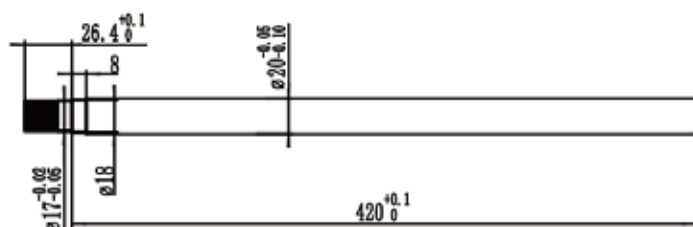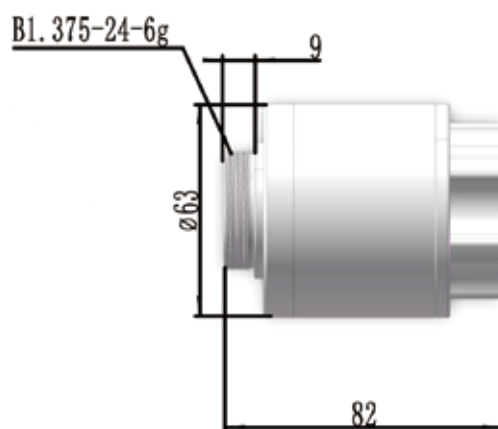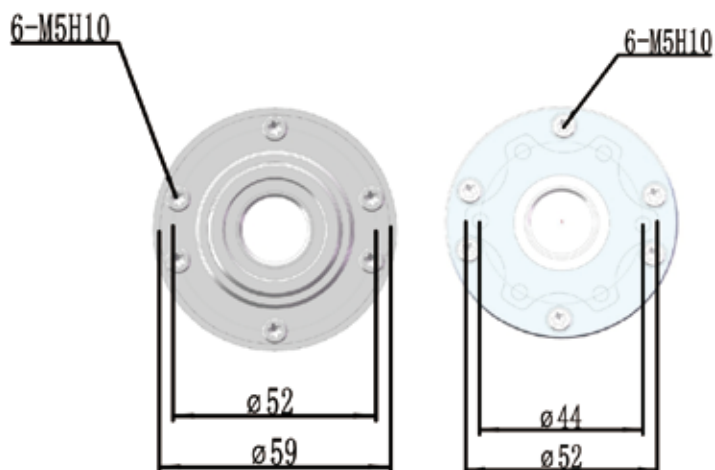


Model 模型	JBCS-S20	Maximum Load 最大载荷	500KG
Body Material 产品材料	AL6061-T6	Service Temperature Range 服务温度范围	-20-60 °C
Color 颜色	Black anodized	Axle Connection 轴连接	Spline axle D20 T21 M0.75
IP Grade IP等级	IP66	Brake Type 刹车类型	V/Disc brake
Weight 重量	≈0.5kg	Drive and Freewheel 飞轮	1S/7S
Rated Load 额定载荷	300KG	Axle Material 轴材料	40Cr



500w-750w rear motor

110DZ

NEW

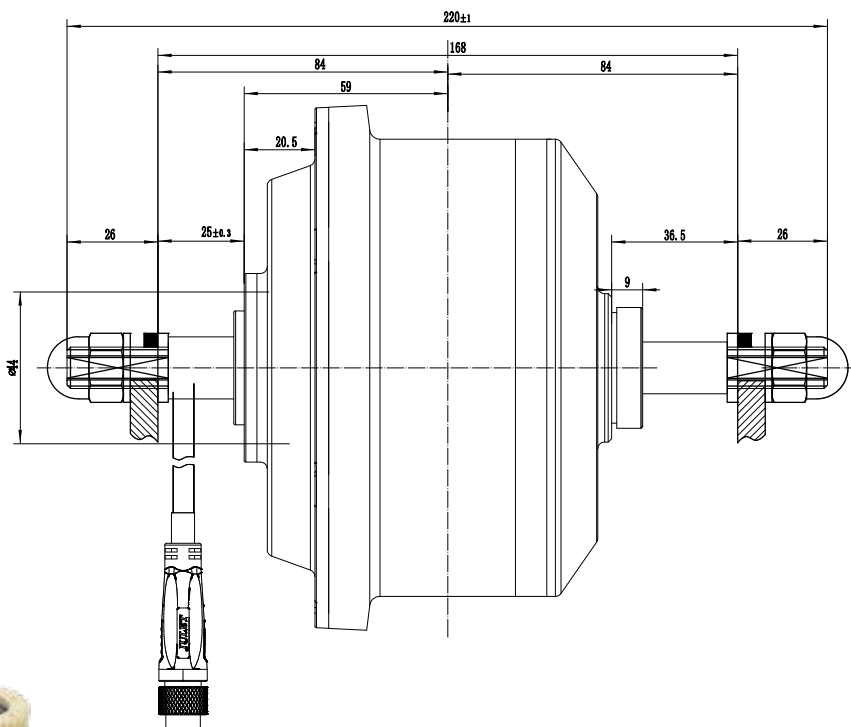


Position 安装位置	Rear	Dropout(mm)开档	158
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	36/48/60	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	250-750	Efficiency (%) 效率	≥ 82
Weight (Kg) 重量	4.5	Color颜色	Black/Silver
Reduction Ratio减速比	1:5.8	Cable Location出线方式	Shaft side left
Max Torque (N.m) 最大扭矩	80	Noise Grade (dB) 噪音等级	≤ 55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25-45	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification 辐条	/	Drive and Freewheel飞轮	6-7S




250W motor 轻量内转子 旋飞/皮带轮

IH45H01

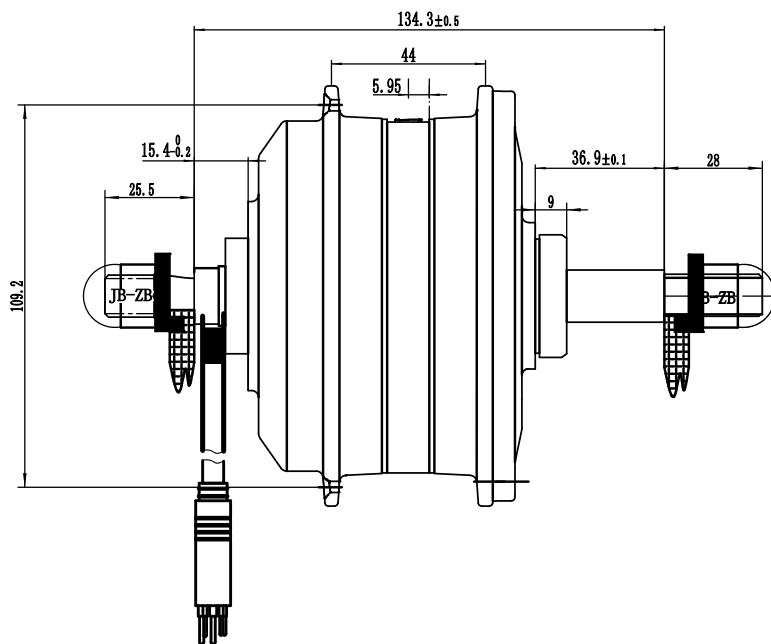

Position 安装位置	Rear	Dropout(mm)开档	135
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	36	Operating Temperature (°C) 工作温度	-20-45
Rated Power (W) 额定功率	250	Efficiency (%) 效率	≥82
Weight (Kg) 重量	1.6	Color颜色	Black/silver
Reduction Ratio减速比	1: 12	Cable Location出线方式	Shaft side left
Max Torque (N.m) 最大扭矩	35	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification 辐条	36H*12G/13G	Drive and Freewheel飞轮	6-7S



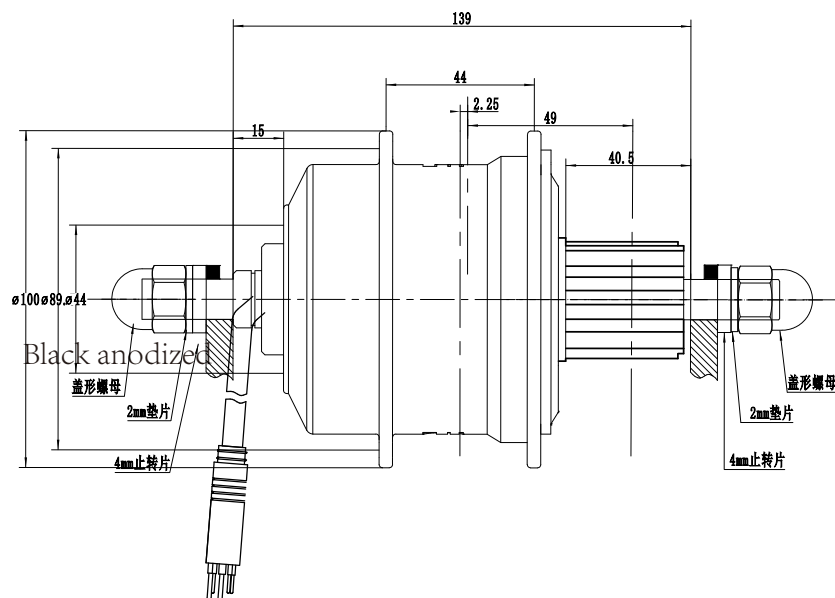


Position 安装位置	Rear	Dropout(mm)开档	139
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	36	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	250	Efficiency (%) 效率	≥82
Weight (Kg) 重量	1.6	Color颜色	Black/Silver
Reduction Ratio减速比	1: 12	Cable Location出线方式	Shaft side left
Max Torque (N.m) 最大扭矩	35	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification 辐条	36H*12G/13G	Drive and Freewheel飞轮	9S



250w front motor

75Q

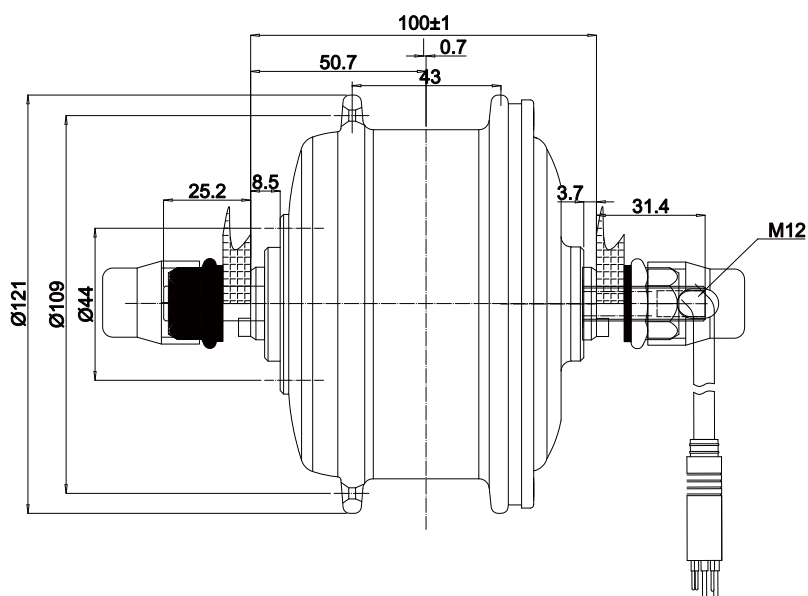


Position 安装位置	Front	Dropout(mm)开档	100
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	24/36/48	Operating Temperature (°C) 工作温度	-20-45
Rated Power (W) 额定功率	250	Efficiency (%) 效率	≥ 82
Weight (Kg) 重量	1.9	Color颜色	Black/Silver
Reduction Ratio减速比	1:4.35	Cable Location出线方式	Shaft center right
Max Torque (N.m) 最大扭矩	35	Noise Grade (dB) 噪音等级	≤ 55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification辐条	36H*12G/13G	Drive and Freewheel飞轮	/




250w motor

75T

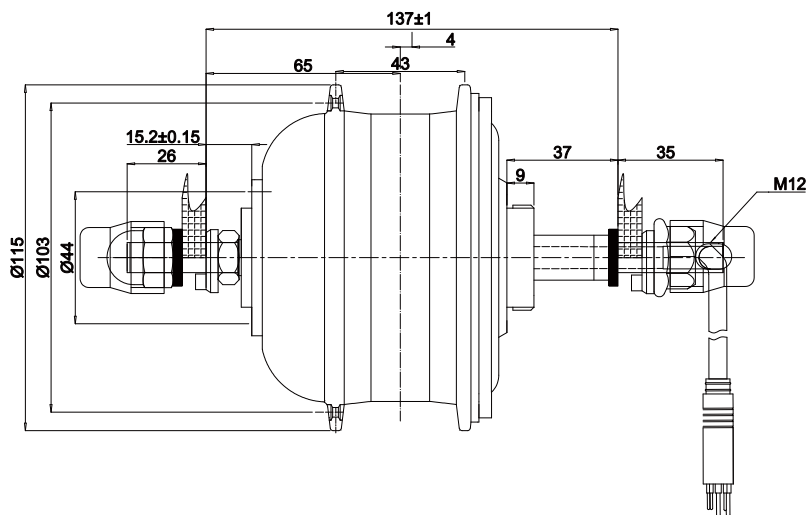

Position 安装位置	Rear	Dropout(mm)开档	137
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	24/36/48	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	250	Efficiency (%) 效率	≥82
Weight (Kg) 重量	2.2	Color颜色	Black/Silver
Reduction Ratio减速比	1:6.1	Cable Location出线方式	Shaft center right
Max Torque (N.m) 最大扭矩	42	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification辐条	36H*12G/13G	Drive and Freewheel飞轮	6-7S

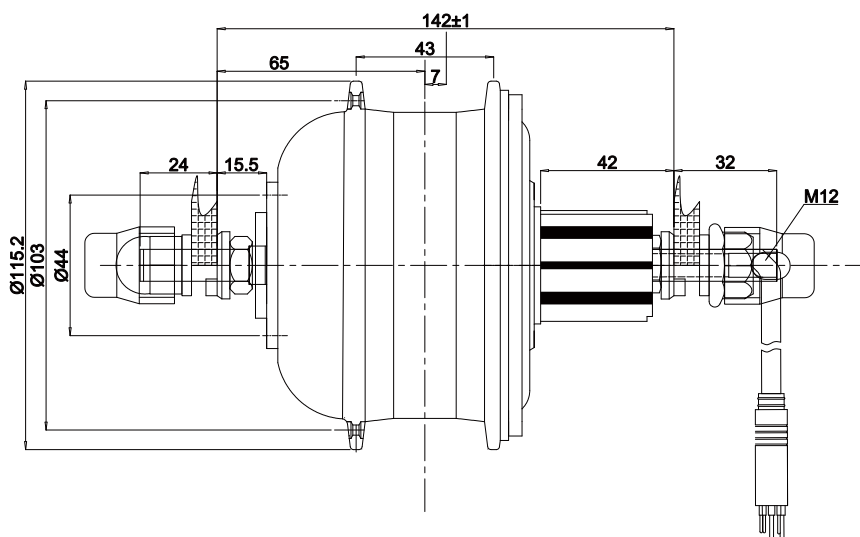


Position 安装位置	Rear	Dropout(mm)开档	142
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	24/36/48	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	250	Efficiency (%) 效率	≥ 82
Weight (Kg) 重量	2.2	Color颜色	Black/Silver
Reduction Ratio减速比	1:6.1	Cable Location出线方式	Shaft center right
Max Torque (N.m) 最大扭矩	42	Noise Grade (dB) 噪音等级	≤ 55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification辐条	36H*12G/13G	Drive and Freewheel飞轮	9S



250-350w front motor

90Q

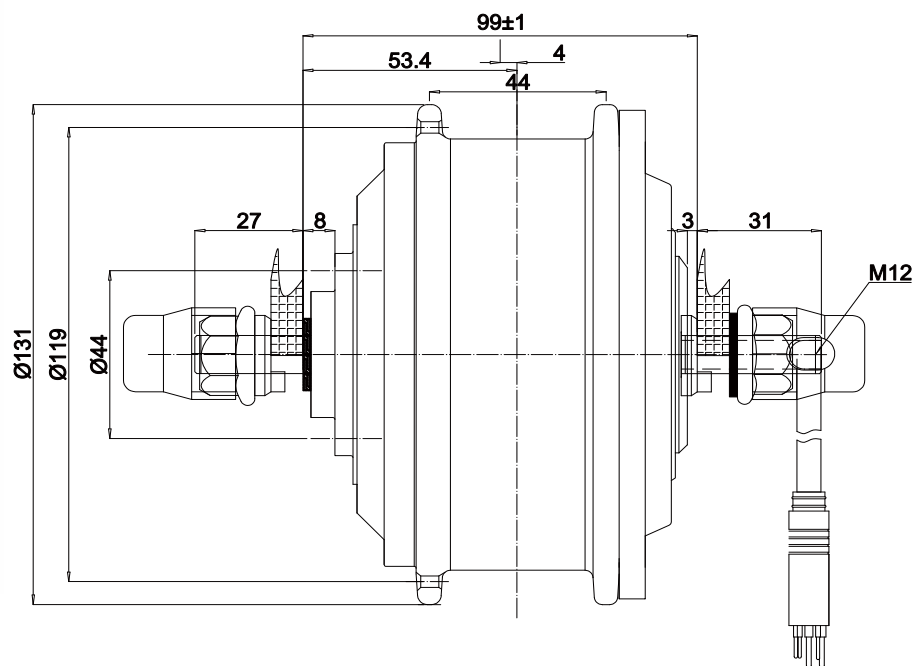


Position 安装位置	Front	Dropout(mm)开档	100
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	24/36/48	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	250/350	Efficiency (%) 效率	≥ 82
Weight (Kg) 重量	2.8	Color颜色	Black/Silver
Reduction Ratio减速比	1:4.4	Cable Location出线方式	Shaft center _right
Max Torque (N.m) 最大扭矩	35	Noise Grade (dB) 噪音等级	≤ 55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification辐条	36H*12G/13G	Drive and Freewheel飞轮	/



250-350w belt motor

90T旋飞/皮带轮

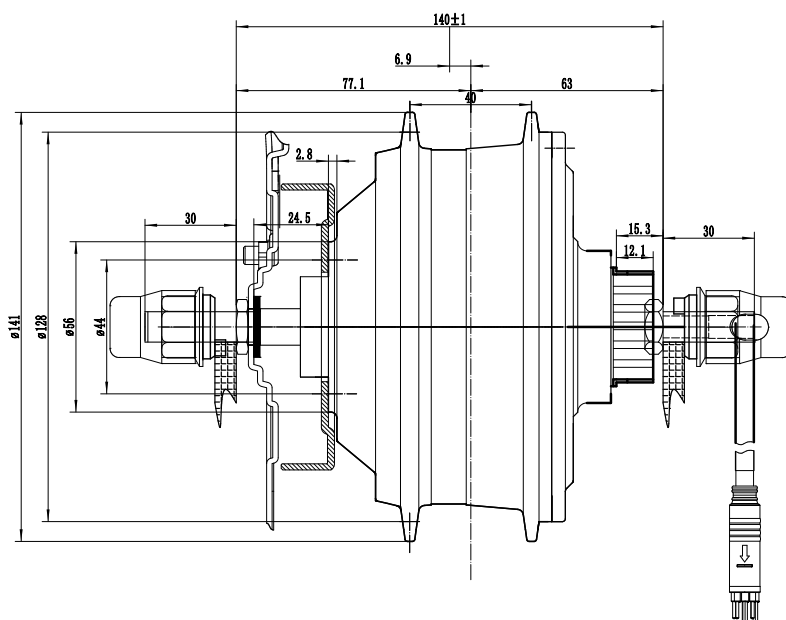


Position 安装位置	Rear	Dropout(mm)开档	137
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	24/36/48	Operating Temperature (°C) 工作温度	-20-45
Rated Power (W) 额定功率	250/350	Efficiency (%) 效率	≥82
Weight (Kg) 重量	3	Color颜色	Black/Silver
Reduction Ratio减速比	1:5.2	Cable Location出线方式	Shaft center right
Max Torque (N.m) 最大扭矩	42	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification辐条	36H*12G/13G	Drive and Freewheel 飞轮	6-7S




250w -350w motor

90SZ

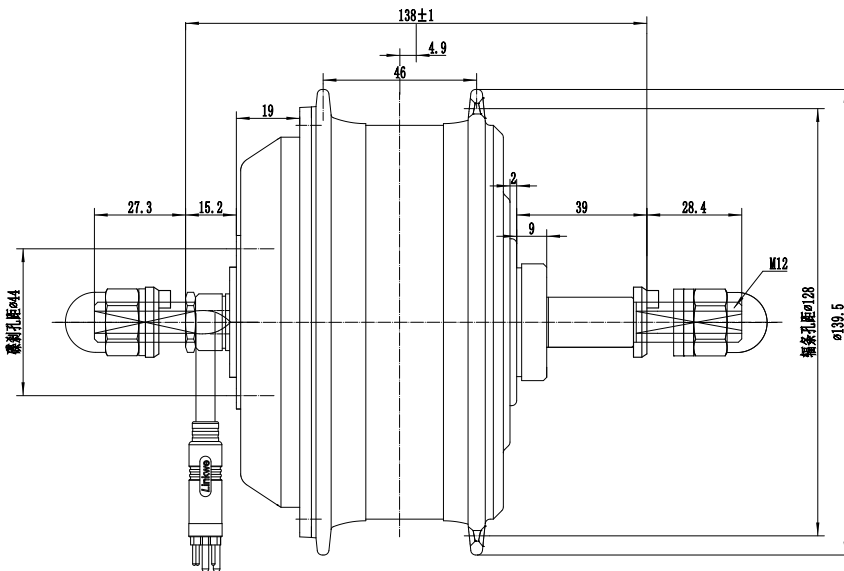

Position 安装位置	Rear	Dropout(mm)开档	138
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	36/48	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	250/350	Efficiency (%) 效率	≥82
Weight (Kg) 重量	3	Color颜色	Black/Silver
Reduction Ratio减速比	1: 5.2	Cable Location出线方式	Shaft side left
Max Torque (N.m) 最大扭矩	42	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification 辐条	36H*12G/13G	Drive and Freewheel飞轮	6-7S

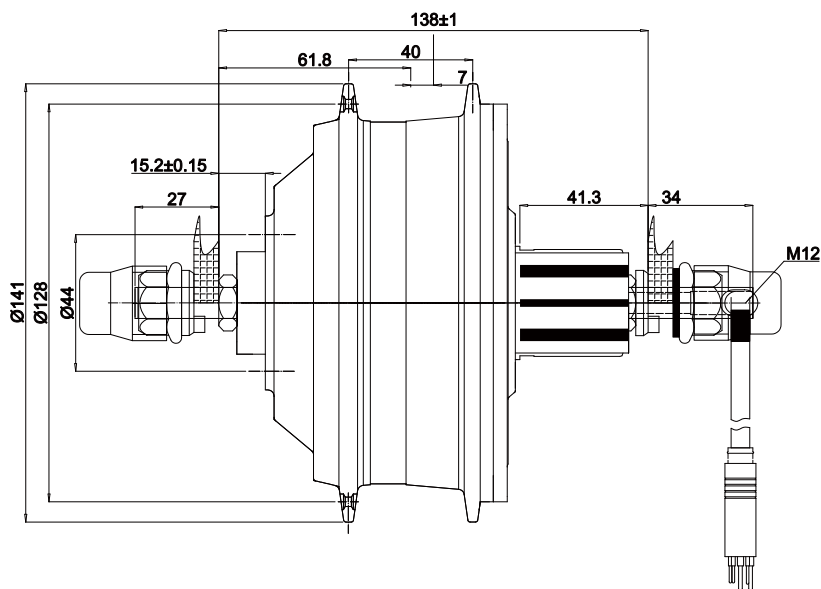


Position 安装位置	Rear	Dropout(mm)开档	138
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	24/36/48	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	250/350	Efficiency (%) 效率	≥82
Weight (Kg) 重量	3	Color颜色	Black/Silver
Reduction Ratio减速比	1:5.2	Cable Location出线方式	Shaft center right
Max Torque (N.m) 最大扭矩	42	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification辐条	36H*12G/13G	Drive and Freewheel 飞轮	9S




250w-350w gear cassette motor

90C2

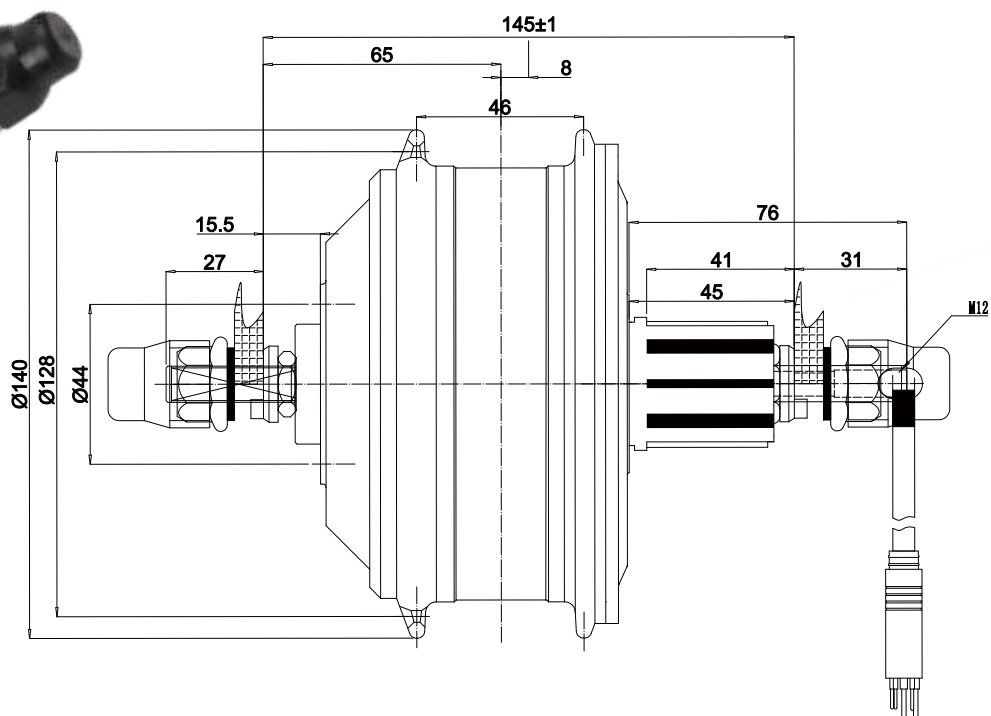


Position 安装位置	Rear	Dropout(mm)开档	145
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	24/36/48	Operating Temperature (°C) 工作温度	-20-45
Rated Power (W) 额定功率	250/350	Efficiency (%) 效率	≥82
Weight (Kg) 重量	3	Color颜色	Black/Silver
Reduction Ratio减速比	1:4.4	Cable Location出线方式	Shaft center right
Max Torque (N.m) 最大扭矩	35	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification辐条	36H*12G/13G	Drive and Freewheel 飞轮	9S

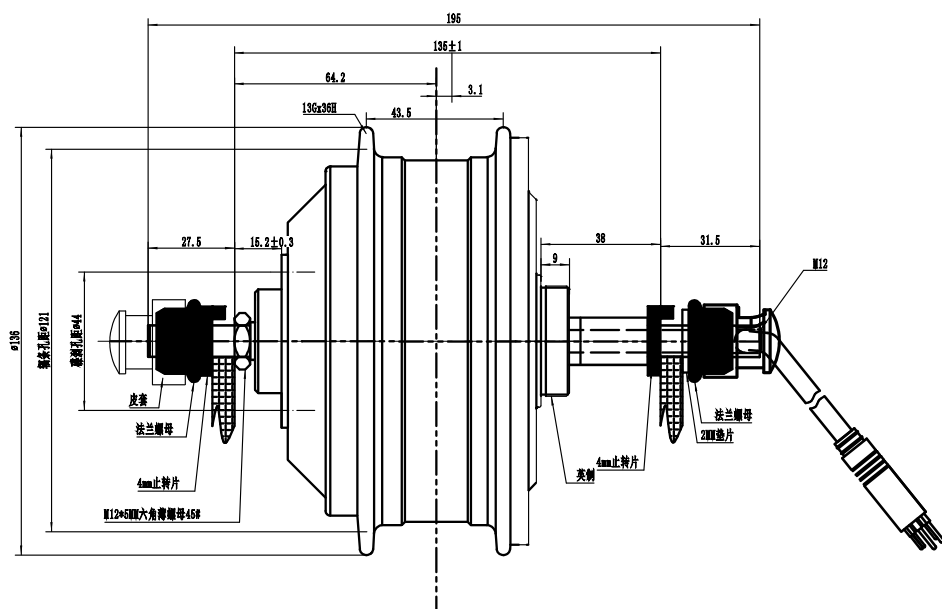

Position 安装位置	Rear	Dropout(mm)开档	135
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	24/36/48	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	250/350	Efficiency (%) 效率	≥82
Weight (Kg) 重量	3	Color颜色	Black/Silver
Reduction Ratio减速比	1:5.17	Cable Location出线方式	Shaft center right
Max Torque (N.m) 最大扭矩	42	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification辐条	36H*12G/13G	Drive and Freewheel 飞轮	6/7S



90HZ

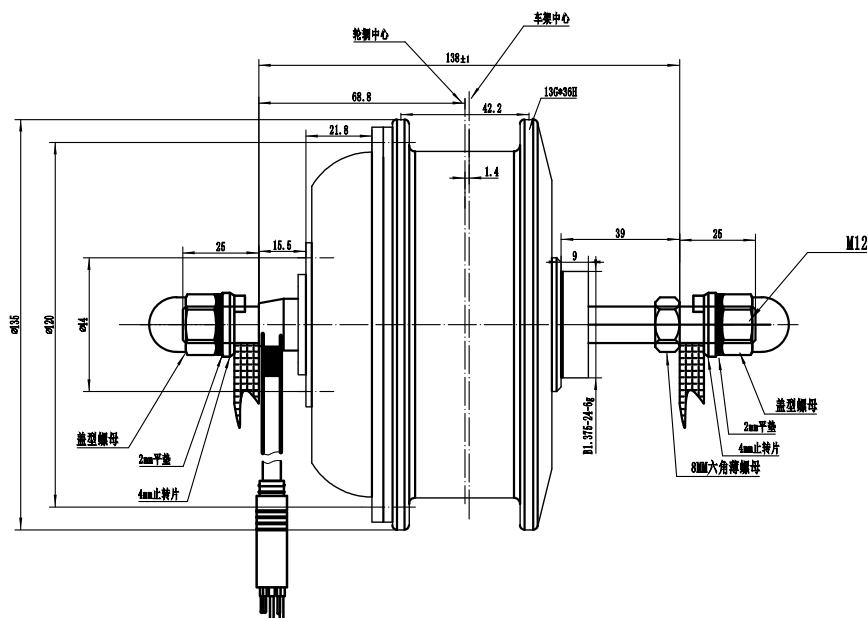


18
0086-519-86511997 | <http://www.czjb.com>





250w Single speed motor


90A3X

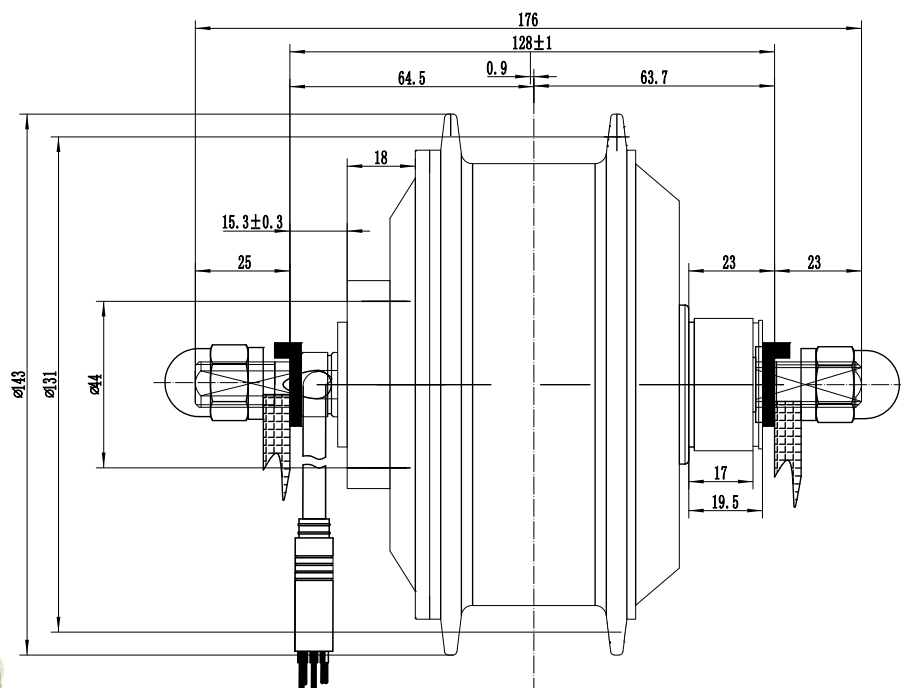

Position 安装位置	Rear	Dropout(mm)开档	128
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	24/36/48	Operating Temperature (°C) 工作温度	-20-45
Rated Power (W) 额定功率	250/350	Efficiency (%) 效率	≥ 82
Weight (Kg) 重量	3	Color颜色	Black/Silver
Reduction Ratio减速比	1:5.2	Cable Location出线方式	Shaft side left
Max Torque (N.m) 最大扭矩	42	Noise Grade (dB) 噪音等级	≤ 55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification辐条	36H*12G/13G	Drive and Freewheel 飞轮	1S



110SZ

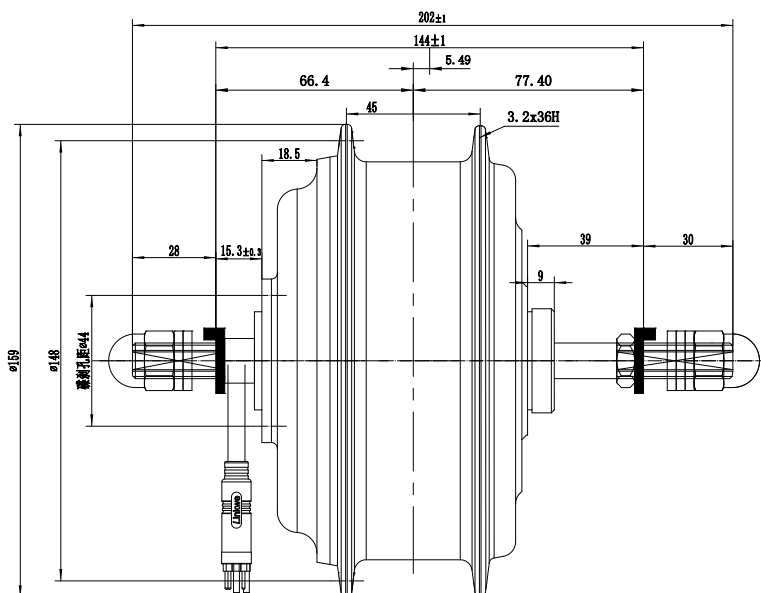


Position 安装位置	Rear	Dropout(mm)开档	144
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	36/48/60	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	350/500	Efficiency (%) 效率	≥ 82
Weight (Kg) 重量	3.5	Color颜色	Black/Silver
Reduction Ratio减速比	1:5.2	Cable Location出线方式	Shaft side left
Max Torque (N.m) 最大扭矩	55	Noise Grade (dB) 噪音等级	≤ 55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25-35	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification 辐条	36H*12G/13G	Drive and Freewheel飞轮	6-7S






350w-500w front motor

105CQ

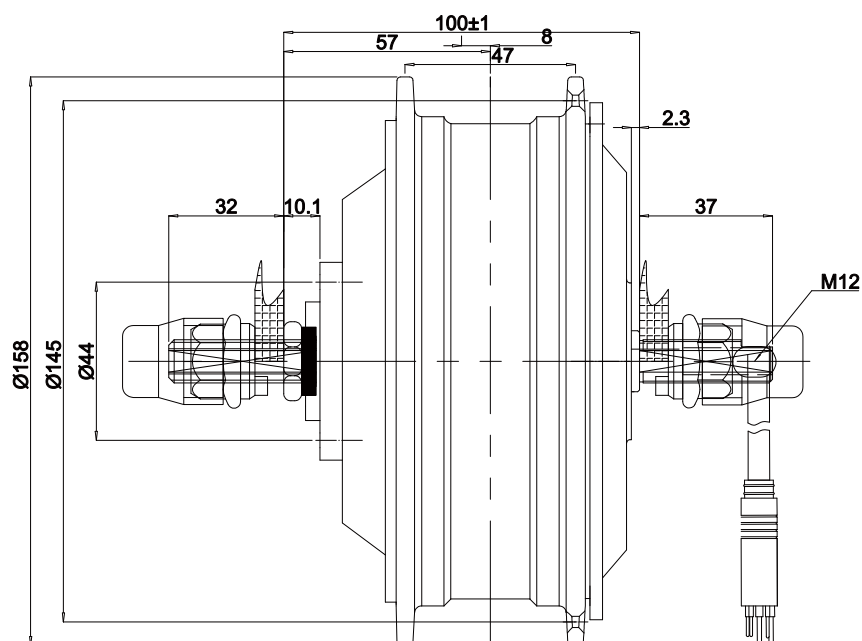

Position 安装位置	Front	Dropout(mm)开档	100
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	36/48/60	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	350/500	Efficiency (%) 效率	≥82
Weight (Kg) 重量	3.5	Color颜色	Black/Silver
Reduction Ratio减速比	1:5.8	Cable Location出线方式	Shaft center right
Max Torque (N.m) 最大扭矩	55	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25-35	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification 辐条	36H*12G/13G	Drive and Freewheel飞轮	/

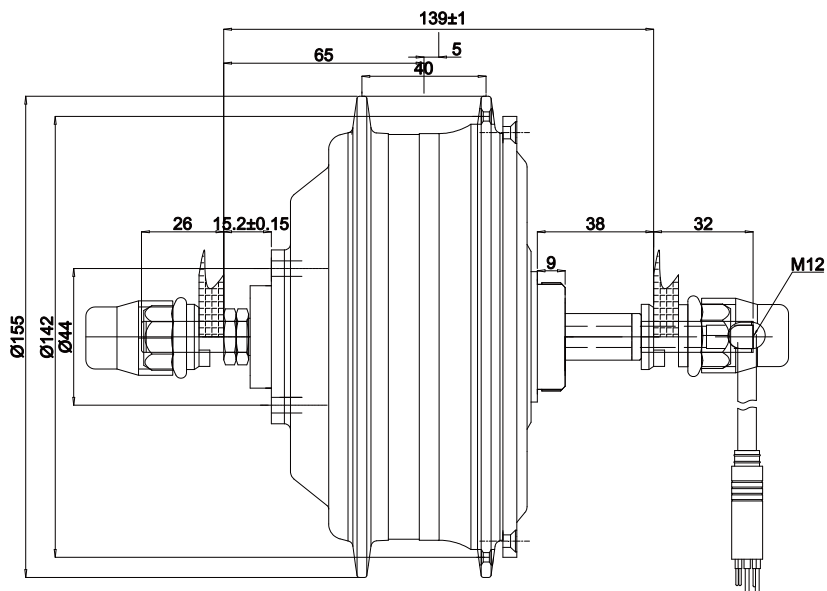


Position 安装位置	Rear	Dropout(mm)开档	139
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	36/48/60	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	350/500	Efficiency (%) 效率	≥82
Weight (Kg) 重量	3.5	Color颜色	Black/Silver
Reduction Ratio减速比	1:5.8	Cable Location出线方式	Shaft center right
Max Torque (N.m) 最大扭矩	55	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25-35	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification 辐条	36H*12G/13G	Drive and Freewheel飞轮	6-7S




350w-500w cassette motor


105C2

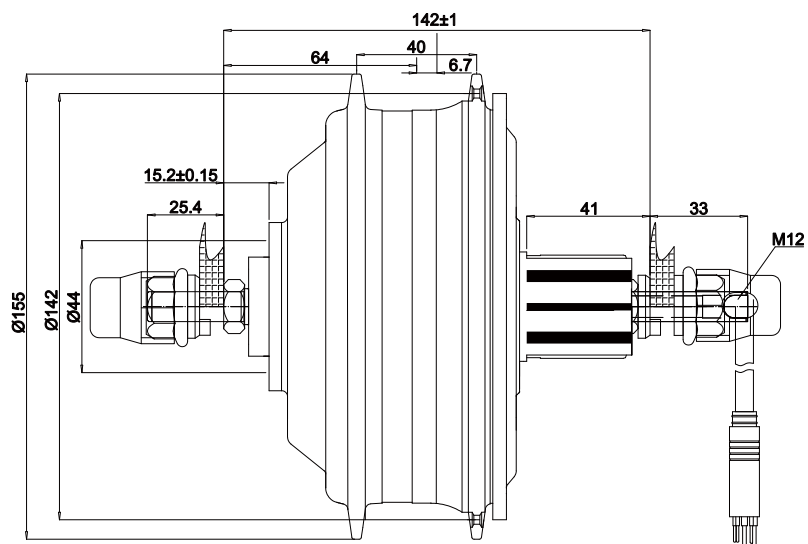

Position 安装位置	Rear	Dropout(mm)开档	142
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	36/48/60	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	350/500	Efficiency (%) 效率	≥82
Weight (Kg) 重量	3.5	Color颜色	Black/Silver
Reduction Ratio减速比	1: 5.8	Cable Location出线方式	Shaft center right
Max Torque (N.m) 最大扭矩	55	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25-35	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification 辐条	36H*12G/13G	Drive and Freewheel飞轮	9S

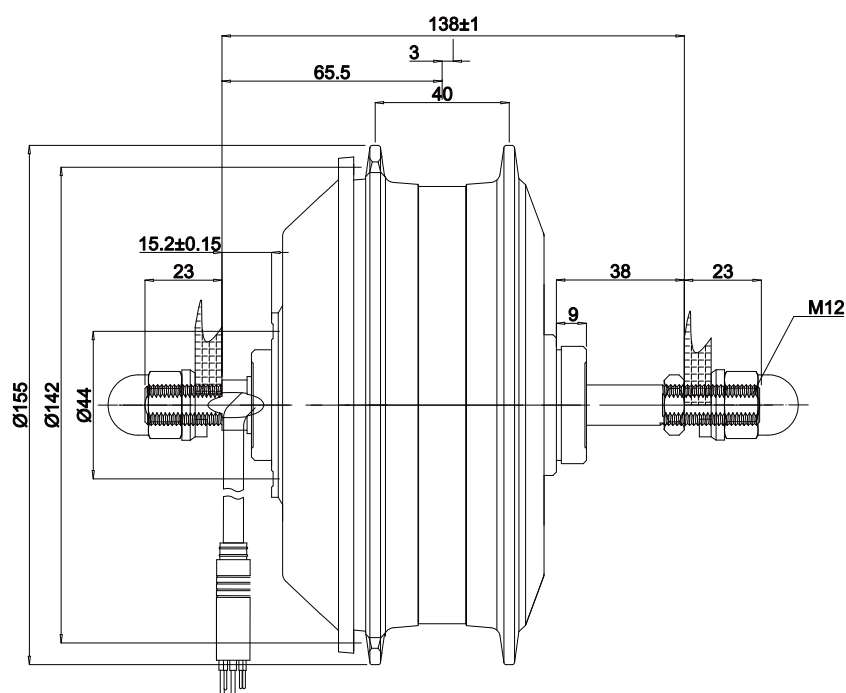


Position 安装位置	Rear	Dropout(mm)开档	138
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	36/48/60	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	350/500	Efficiency (%) 效率	≥ 82
Weight (Kg) 重量	3.5	Color颜色	Black/Silver
Reduction Ratio减速比	1:5.8	Cable Location出线方式	Shaft side left
Max Torque (N.m) 最大扭矩	55	Noise Grade (dB) 噪音等级	≤ 55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25-35	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification 辐条	36H*12G/13G	Drive and Freewheel飞轮	6-7S

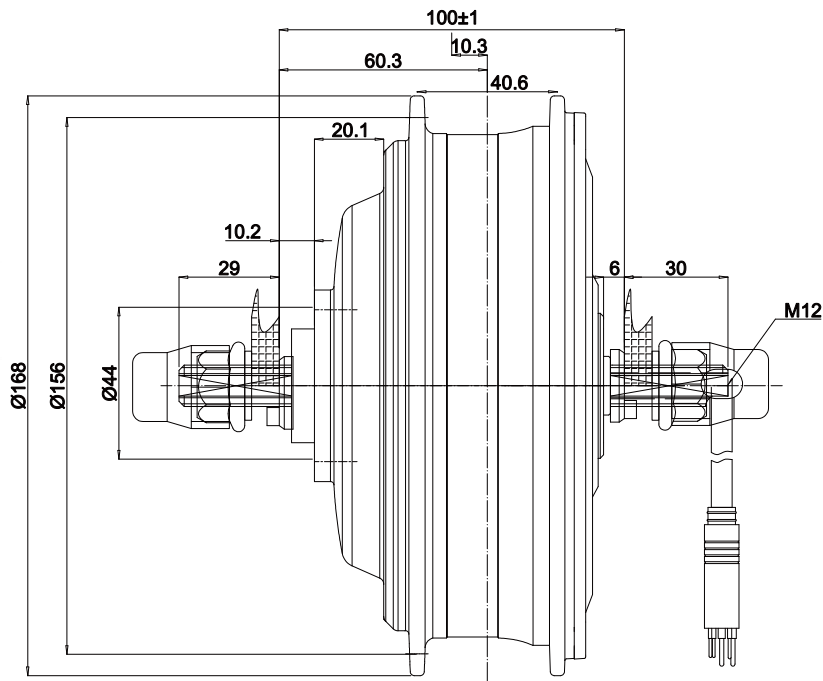

Position 安装位置	Front	Dropout(mm)开档	100
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	36/48	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	500	Efficiency (%) 效率	≥82
Weight (Kg) 重量	3.7	Color颜色	Black//Silver
Reduction Ratio减速比	1:5.2	Cabling Route出线方式	Shaft center right
Max Torque (N.m) 最大扭矩	65	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25-35	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification 辐条	36H*12G/13G	Drive and Freewheel飞轮	/



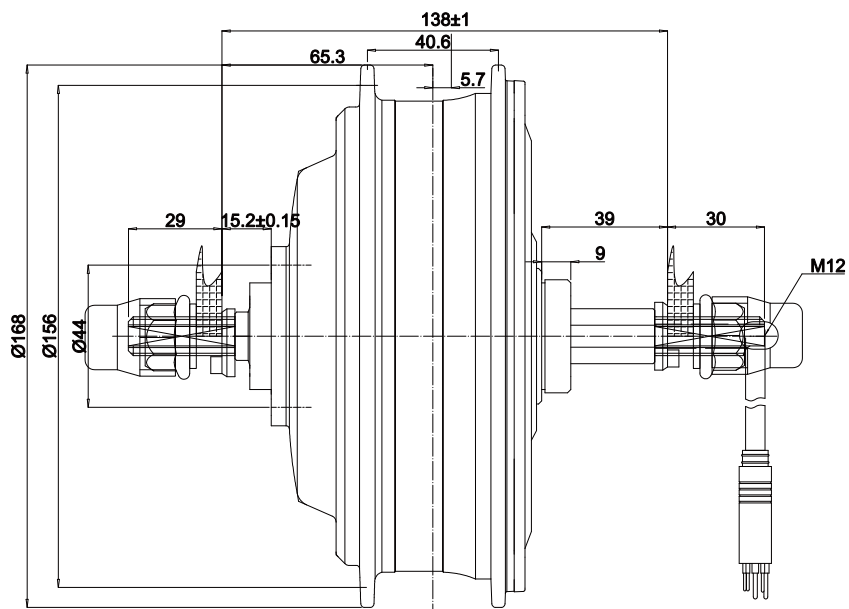


Position 安装位置	Rear	Dropout(mm)开档	138
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	36/48	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	500	Efficiency (%) 效率	≥82
Weight (Kg) 重量	3.7	Color颜色	Black/Silver
Reduction Ratio减速比	1:5.2	Cable Location出线方式	Shaft center right
Max Torque (N.m) 最大扭矩	65	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25-35	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification 辐条	36H*12G/13G	Drive and Freewheel飞轮	6-7S




500w cassette motor

121T2

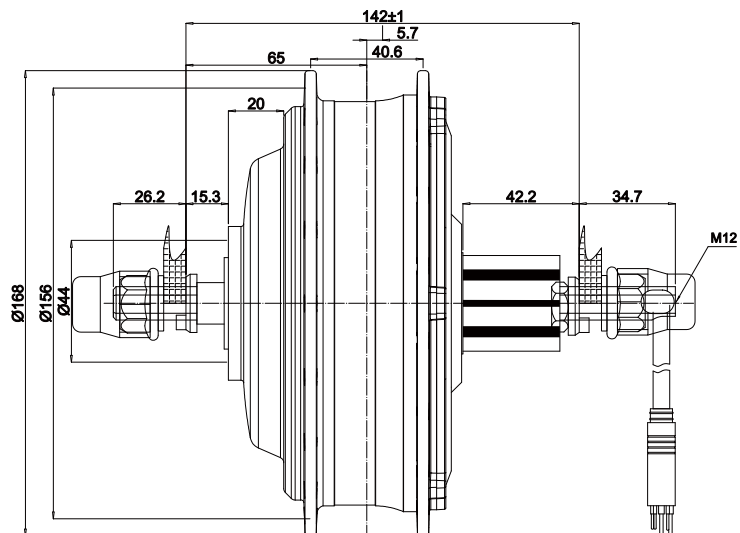

Position 安装位置	Rear	Dropout(mm)开档	142
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	36/48	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	500	Efficiency (%) 效率	≥82
Weight (Kg) 重量	3.7	Color颜色	Black/Silver
Reduction Ratio减速比	1:5.2	Cable Location出线方式	Shaft center right
Max Torque (N.m) 最大扭矩	65	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25-35	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification 辐条	36H*12G/13G	Drive and Freewheel飞轮	9S

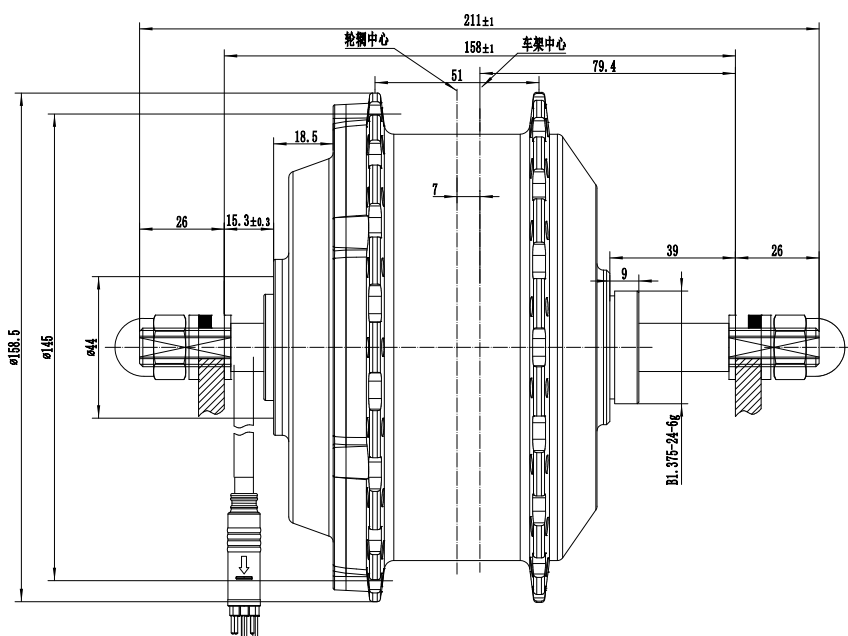


Position 安装位置	Rear	Dropout(mm)开档	158
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	36/48/60	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	250-750	Efficiency (%) 效率	≥ 82
Weight (Kg) 重量	4.5	Color颜色	Black/Silver
Reduction Ratio减速比	1:5.8	Cable Location出线方式	Shaft side left
Max Torque (N.m) 最大扭矩	80	Noise Grade (dB) 噪音等级	≤ 55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25-45	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification 辐条	36H*12G/13G	Drive and Freewheel飞轮	6-7S



750w fat tire front motor

110CQ

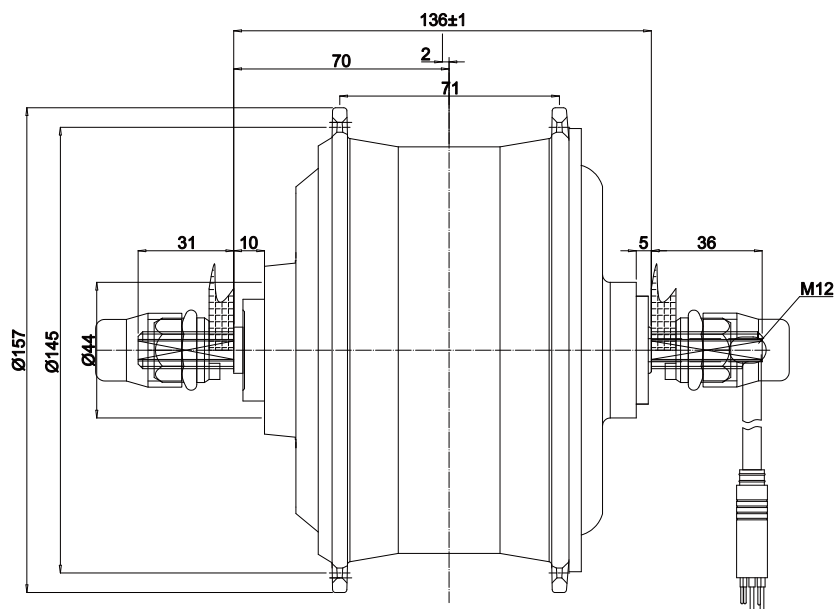


Position 安装位置	Front	Dropout(mm)开档	136
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	36/48/60	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	250-750	Efficiency (%) 效率	≥ 82
Weight (Kg) 重量	4.5	Color颜色	Black/Silver
Reduction Ratio减速比	1:5.8	Cable Location出线方式	Shaft center right
Max Torque (N.m) 最大扭矩	80	Noise Grade (dB) 噪音等级	≤ 55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25-45	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification辐条	36H*12G/13G	Drive and Freewheel飞轮	6-7S



750w fat tire motor

110CS

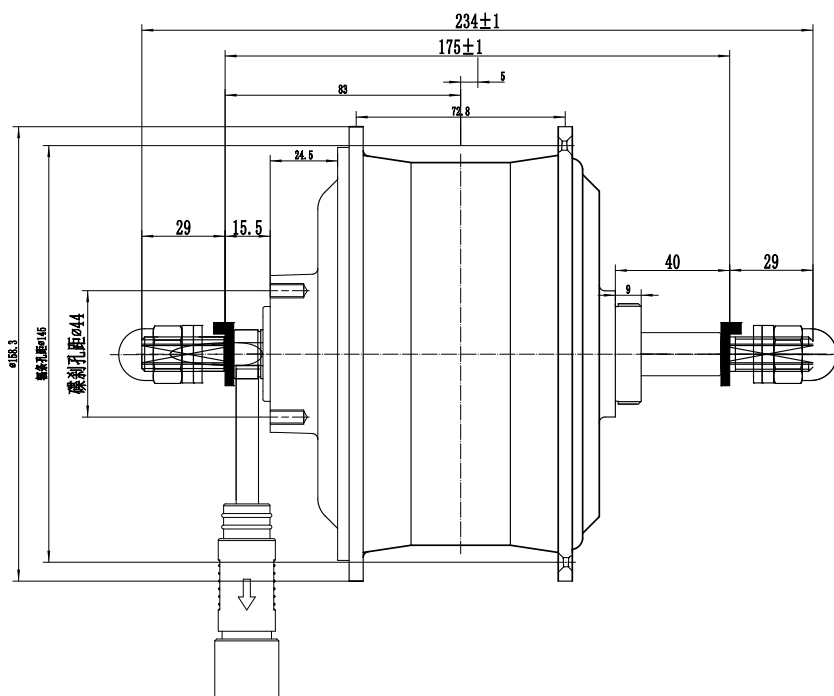


Position 安装位置	Rear	Dropout(mm)开档	170-195
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	36/48/60	Operating Temperature (°C) 工作温度	-20-45
Rated Power (W) 额定功率	250-750	Efficiency (%) 效率	≥82
Weight (Kg) 重量	4.5	Color颜色	Black/Silver
Reduction Ratio减速比	1:5.8	Cable Location出线方式	Shaft center left/right
Max Torque (N.m) 最大扭矩	80	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25-45	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification辐条	36H*12G/13G	Drive and Freewheel 飞轮	6-7S



350w/500w motor with built-in lock 内置电子锁 110C

NEW

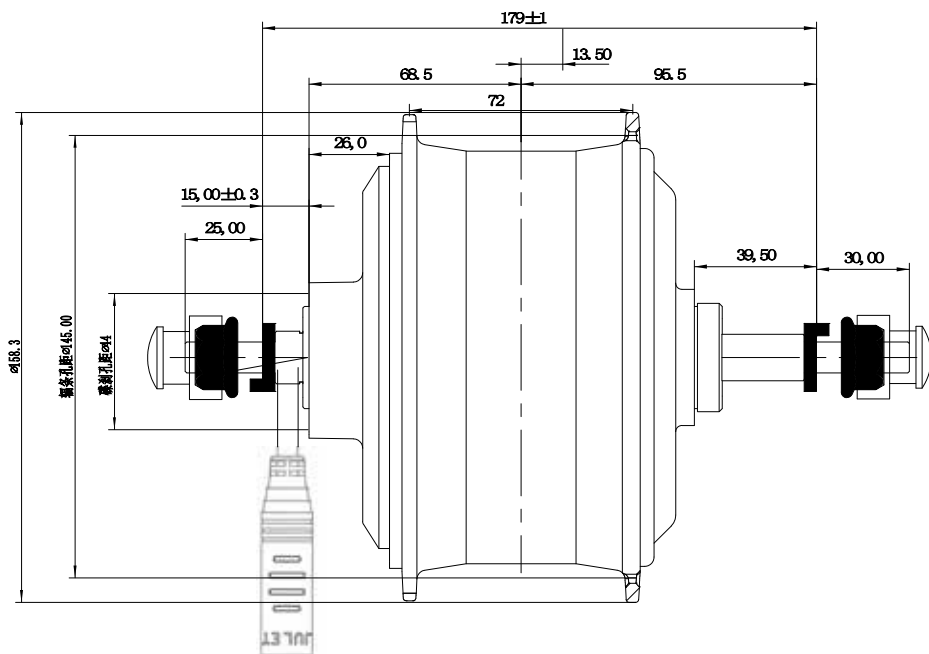


Position 安装位置	Rear	Dropout(mm)开档	179
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	36/48	Operating Temperature (°C) 工作温度	-20-45
Rated Power (W) 额定功率	350-500	Efficiency (%) 效率	≥ 82
Weight (Kg) 重量	4.5	Color颜色	Black/Silver
Reduction Ratio减速比	1:5.8	Cable Location出线方式	Shaft side left
Max Torque (N.m) 最大扭矩	80	Noise Grade (dB) 噪音等级	≤ 55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25-45	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification辐条	36H*12G/13G	Drive and Freewheel 飞轮	6-7S





1000w fat tire motor


121CZ

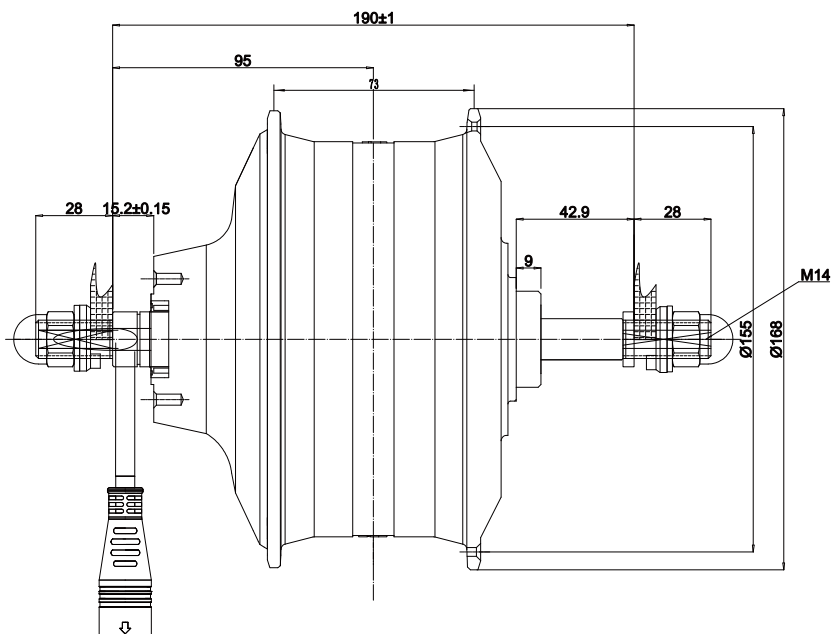

Position 安装位置	Rear	Dropout(mm)开档	175/195
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	36/48/60	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	750-1000	Efficiency (%) 效率	≥82
Weight (Kg) 重量	5	Color颜色	Black/Silver
Reduction Ratio减速比	1: 5.8	Cable Location出线方式	Shaft center right
Max Torque (N.m) 最大扭矩	100	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	20-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25-45	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification辐条	36H*12G/13G	Drive and Freewheel 飞轮	6-7S



135CZ

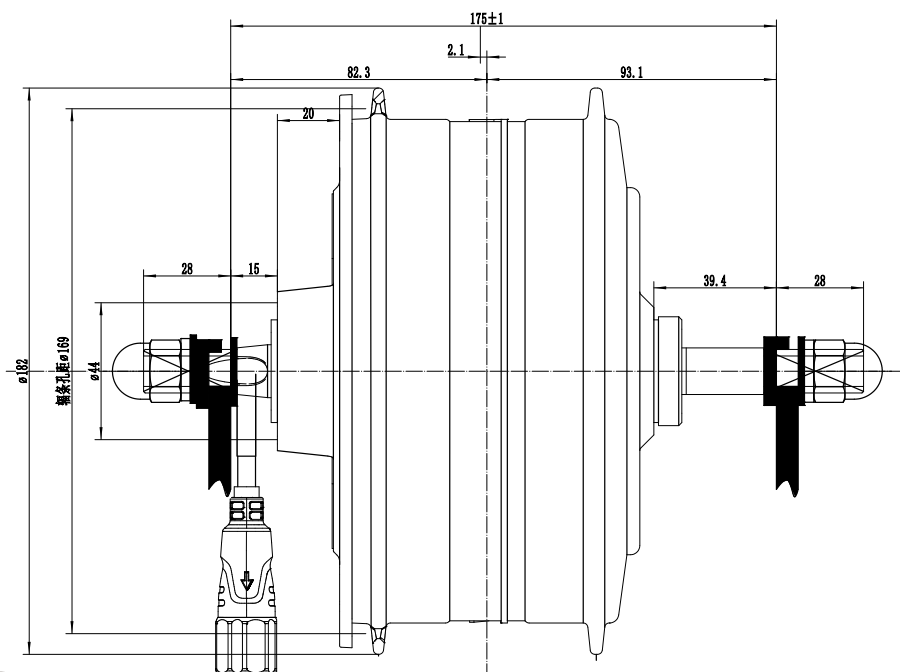

Position 安装位置	Rear	Dropout(mm)开档	175/190
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	48/52/60/72	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	1500	Efficiency (%) 效率	≥ 82
Weight (Kg) 重量	7	Color颜色	Black/Silver
Reduction Ratio减速比	1: 3	Cable Location出线方式	Shaft side left
Max Torque (N.m) 最大扭矩	120	Noise Grade (dB) 噪音等级	≤ 55db
Wheel Diameter (Inch) 轮径	20-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	65	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification辐条	36H*12G/13G	Drive and Freewheel 飞轮	6-7S






1500w thru-axle motor

135CZT筒轴电机

NEW

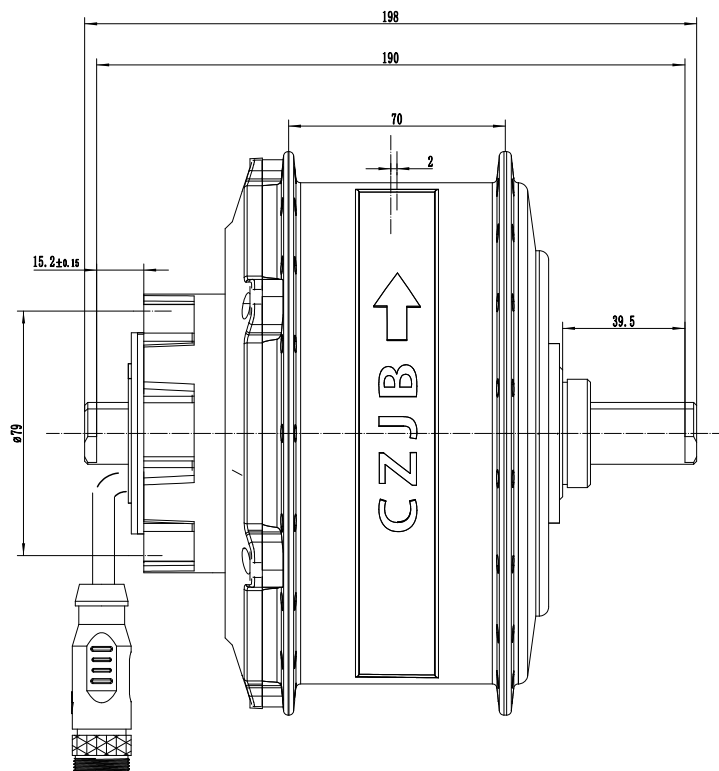


Position 安装位置	Rear	Dropout(mm)开档	190
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	48/52/60/72	Operating Temperature (°C) 工作温度	-20-45
Rated Power (W) 额定功率	1500	Efficiency (%) 效率	≥82
Weight (Kg) 重量	5.8	Color颜色	Black
Reduction Ratio减速比	1: 3	Cable Location出线方式	Shaft side left
Max Torque (N.m) 最大扭矩	120	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	20-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	65	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification辐条	36H*12G/13G	Drive and Freewheel 飞轮	6-7S




1000w motor

135TZ

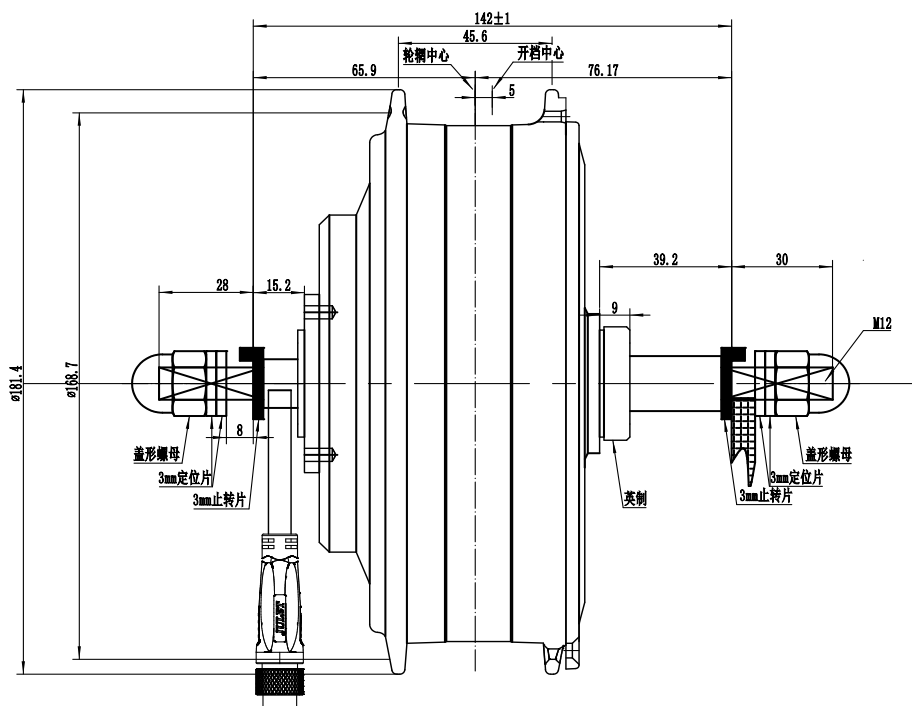

Position 安装位置	Rear	Dropout(mm)开档	141
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	24/36/48	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	750-1000	Efficiency (%) 效率	≥82
Weight (Kg) 重量	4.5	Color颜色	Black/Shining/Silver
Reduction Ratio减速比	1:5.8	Cable Location出线方式	Shaft center right
Max Torque (N.m) 最大扭矩	95	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	16-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25-45	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification 辐条	36H*12G/13G	Drive and Freewheel飞轮	6-7S

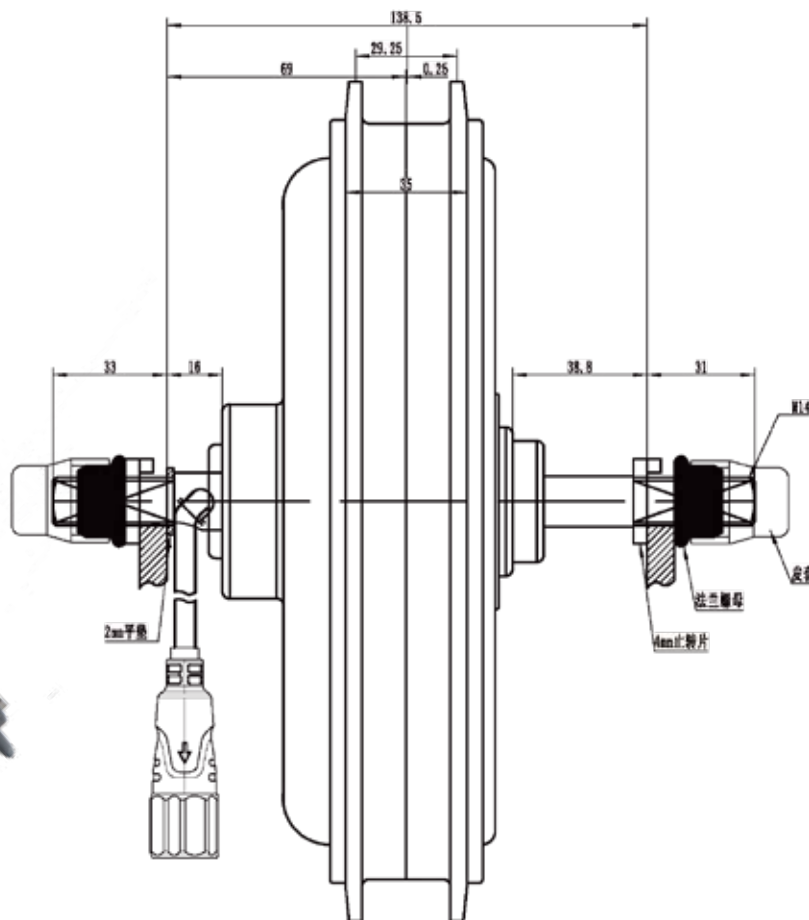

Position 安装位置	Front/Rear	Dropout(mm)开档	front:100mm rear :135
Construction电机结构	Gearless	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	36/48/60/72	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	350-1000	Efficiency (%) 效率	≥82
Weight (Kg) 重量	7	Color颜色	Black/Silver
Reduction Ratio减速比	/	Cable Location出线方式	Shaft center left/right
Max Torque (N.m) 最大扭矩	45-55	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	20-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25-55	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification 辐条	36H*12G/13G	Drive and Freewheel飞轮	6-7S




1000w gearless cassette motor

205-35H2



48

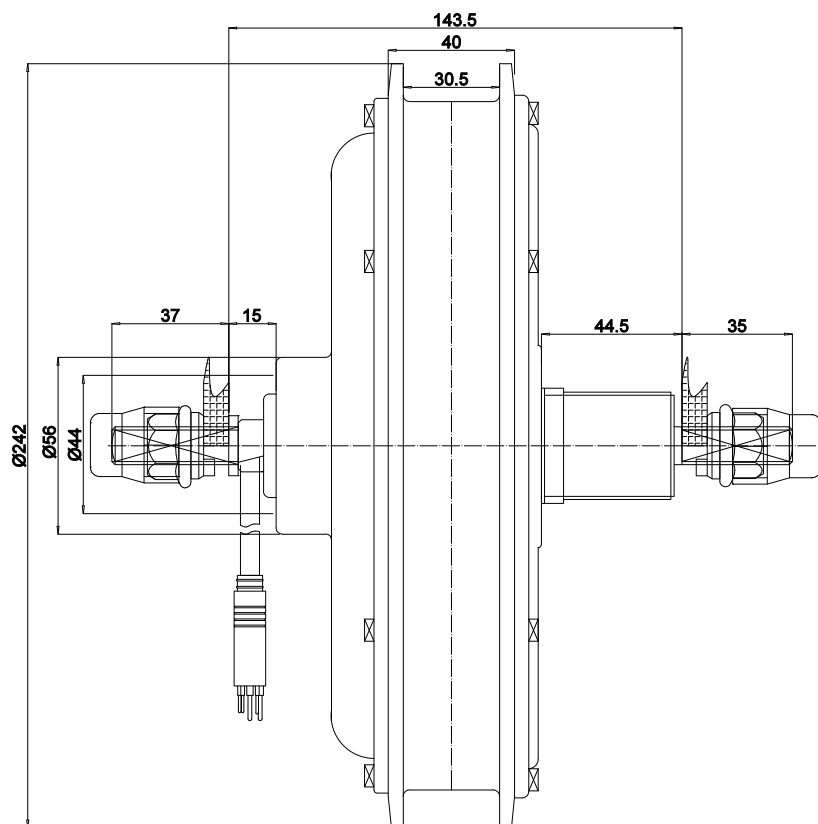


Position 安装位置	Rear	Dropout(mm)开档	140
Construction电机结构	Gearless	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	36/48/60/72	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	350-1000	Efficiency (%) 效率	≥82
Weight (Kg) 重量	7	Color颜色	Black/Silver
Reduction Ratio减速比	/	Cable Location出线方式	Shaft side left
Max Torque (N.m) 最大扭矩	45-55	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	20-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25-55	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification 辐条	36H*12G/13G	Drive and Freewheel飞轮	9S





1500w-3000w gearless motor

205-55

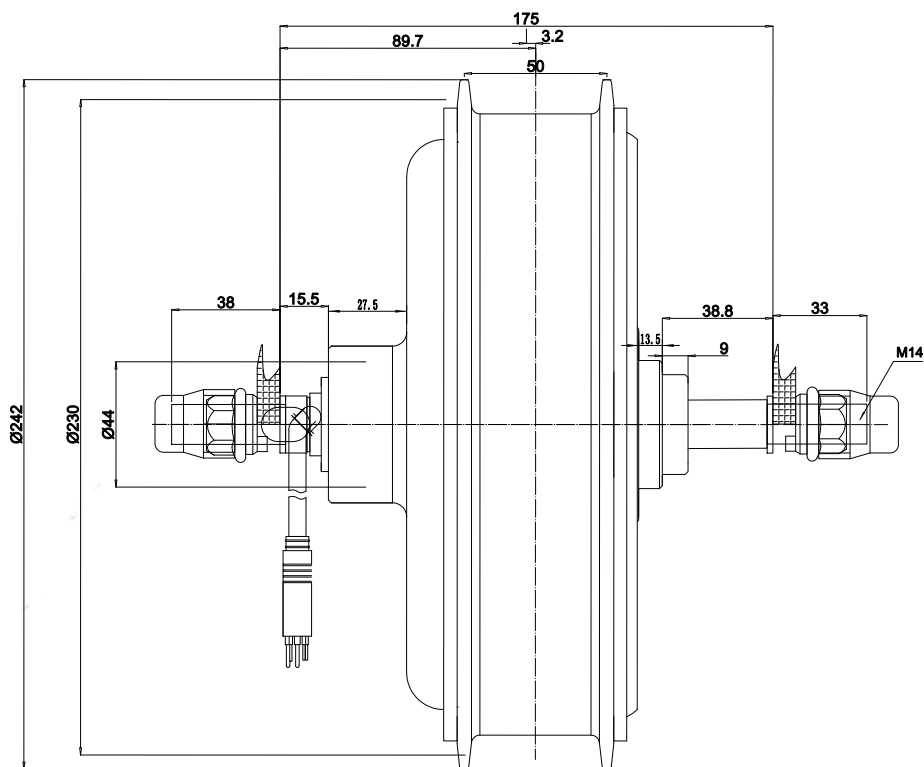


Position 安装位置	Rear	Dropout(mm)开档	175
Construction电机结构	Gearless	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	36/48/60/72	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	350-3000	Efficiency (%) 效率	≥82
Weight (Kg) 重量	7-11	Color颜色	Black/Silver
Reduction Ratio减速比	/	Cable Location出线方式	Shaft side left
Max Torque (N.m) 最大扭矩	80	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	20-28	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25-55	Salt spray Test Standard (h) 盐雾测试	24/96
Spoke Specification 辐条	36H*12G/13G	Drive and Freewheel飞轮	6-7S



12" aluminium alloy motor

90-12"

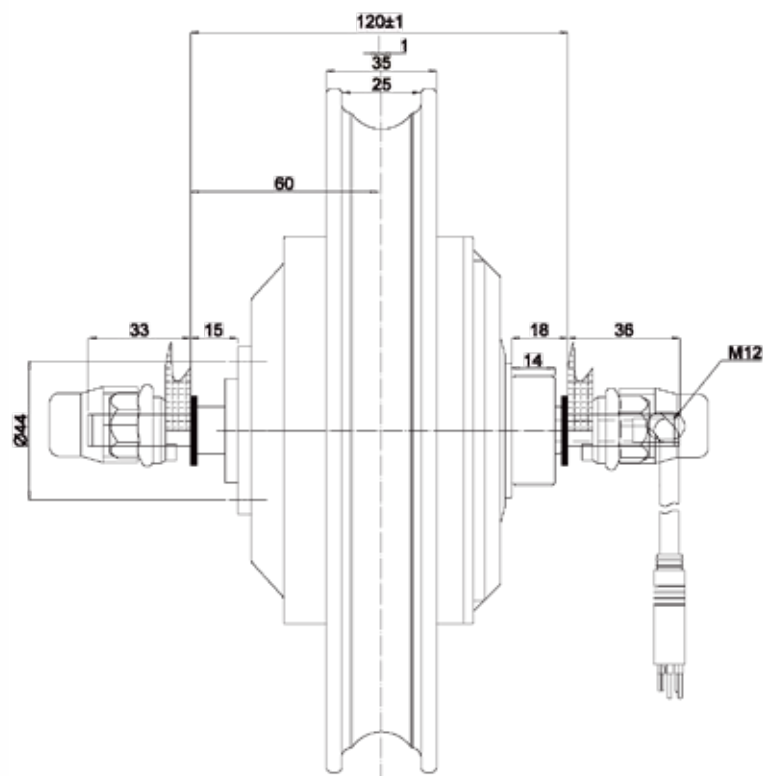


Position 安装位置	Rear	Dropout(mm)开档	120
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	24/36/48	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	250/350	Efficiency (%) 效率	≥82
Weight (Kg) 重量	3.2	Color颜色	Black/Shining/Silver
Reduction Ratio减速比	1:4.4	Cable Location出线方式	Shaft center right
Max Torque (N.m) 最大扭矩	35	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	12	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25-30	Salt spray Test Standard (h) 盐雾测试	24/96
		Drive and Freewheel飞轮	1S



14" aluminium alloy motor

90-14"

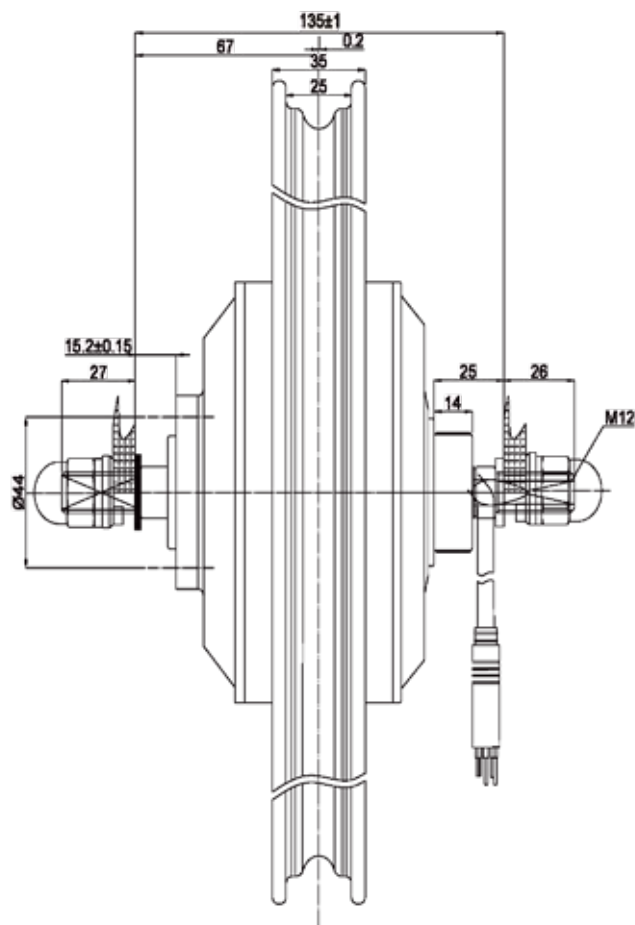


Position 安装位置	Rear	Dropout(mm)开档	135
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc/Expansile brake
Rated Voltage (V) 额定电压	24/36/48	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	250/350	Efficiency (%) 效率	≥82
Weight (Kg) 重量	3.3	Color颜色	Black//Shining/Silver
Reduction Ratio减速比	1:4.4	Cable Location出线方式	Shaft Center Right
Max Torque (N.m) 最大扭矩	35	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	14	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25-30	Salt spray Test Standard (h) 盐雾测试	24/96
		Drive and Freewheel飞轮	1S



16" aluminium/magnesium alloy motor

90-16"

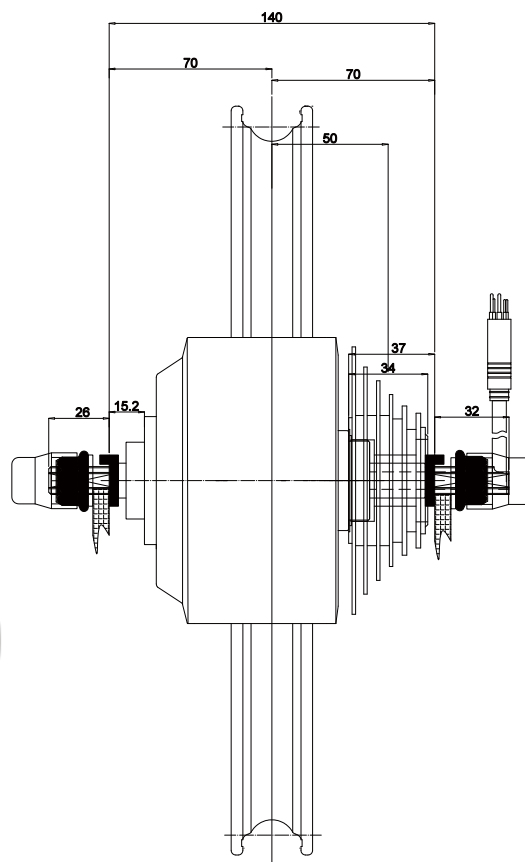


Position 安装位置	Rear	Dropout(mm)开档	135-138
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	36/48	Operation Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	250/350	Efficiency (%) 效率	≥82
Weight (Kg) 重量	3.5	Color颜色	Black/Shining/Silver
Reduction Ratio减速比	1:4.4	Cable Location 出线方式	Shaft center right
Max Torque (N.m) 最大扭矩	35	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	16	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25-30	Salt spray Test Standard (h) 盐雾测试	24/96
		Drive and Freewheel飞轮	1S/7S



16" fat tire aluminium alloy motor

110-16"

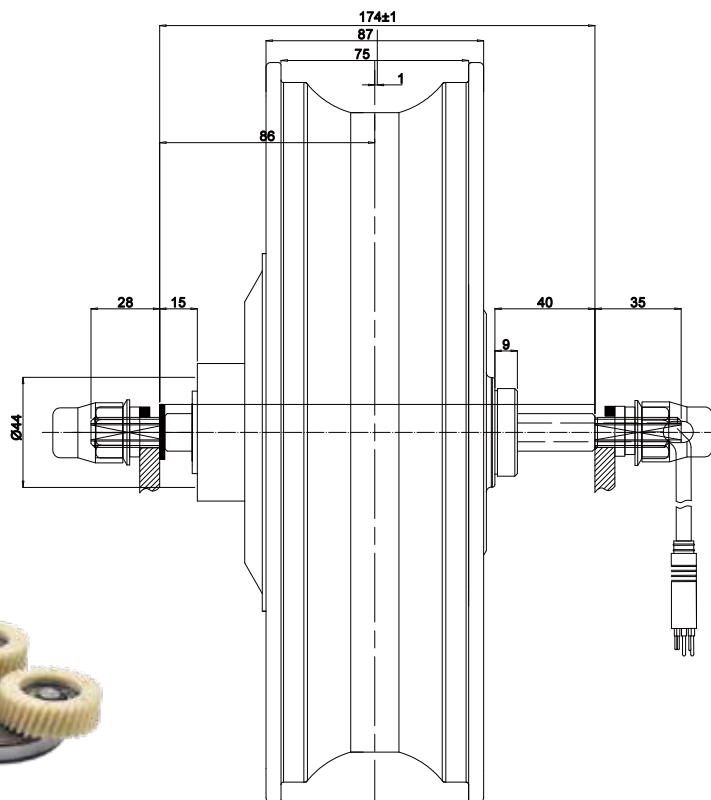


Position 安装位置	Rear	Dropout(mm)开档	175
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	36/48/60	Operation Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	250-750	Efficiency (%) 效率	≥82
Weight (Kg) 重量	5	Color颜色	Black//Shining/Silver
Reduction Ratio减速比	1:5.8	Cable Location 出线方式	Shaft center right
Max Torque (N.m) 最大扭矩	80	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	16	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25-45	Salt spray Test Standard (h) 盐雾测试	24/96
		Drive and Freewheel飞轮	6-7S



20" aluminium/magnesium alloy motor

90-20"

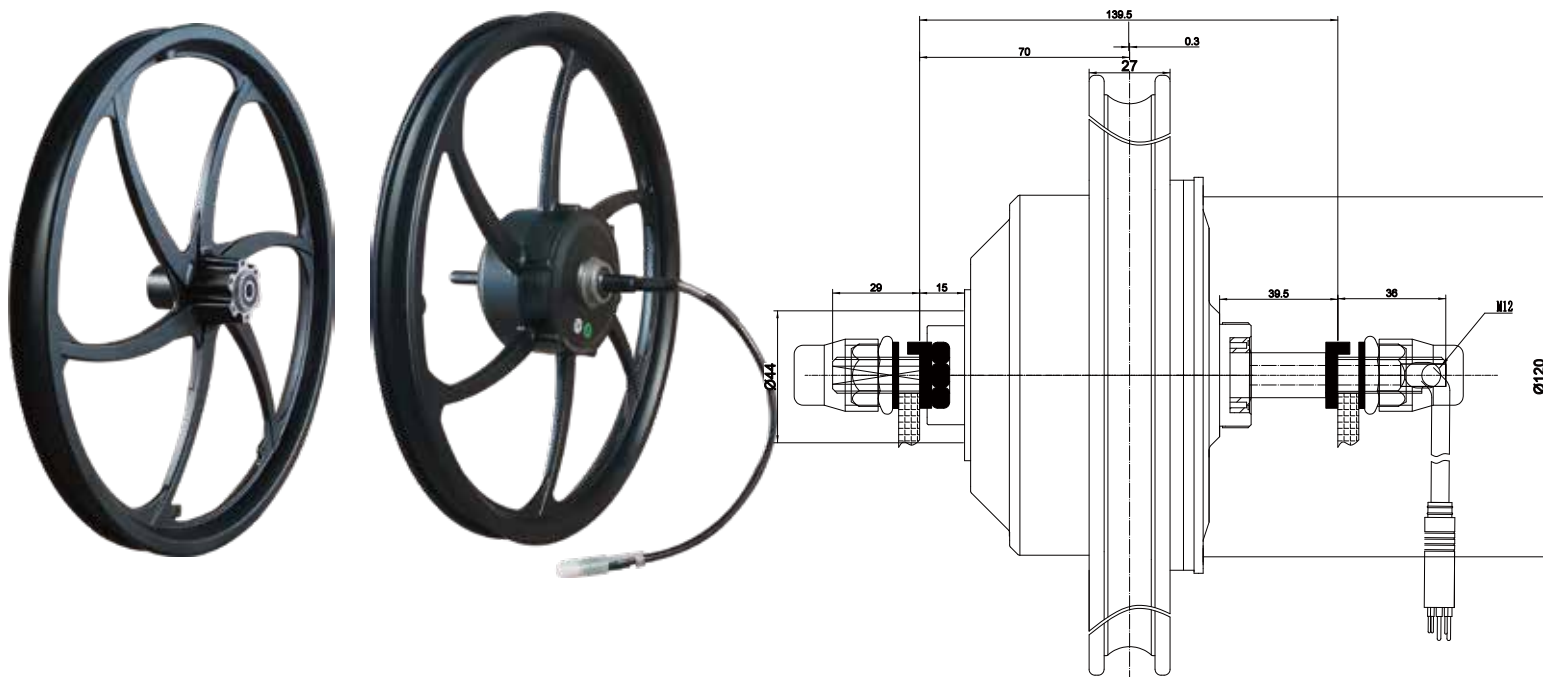


Position 安装位置	Rear	Dropout(mm)开档	140
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc/Expansile brake
Rated Voltage (V) 额定电压	24/36/48	Operating Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	250/350	Efficiency (%) 效率	≥82
Weight (Kg) 重量	3.2	Color颜色	Black//Shining/Silver
Reduction Ratio减速比	1:4.4	Cable Location出线方式	Shaft center right
Max Torque (N.m) 最大扭矩	35	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	20	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25-30	Salt spray Test Standard (h) 盐雾测试	24/96
		Drive and Freewheel飞轮	6-7S



20" fat tire aluminium alloy motor


110-20"

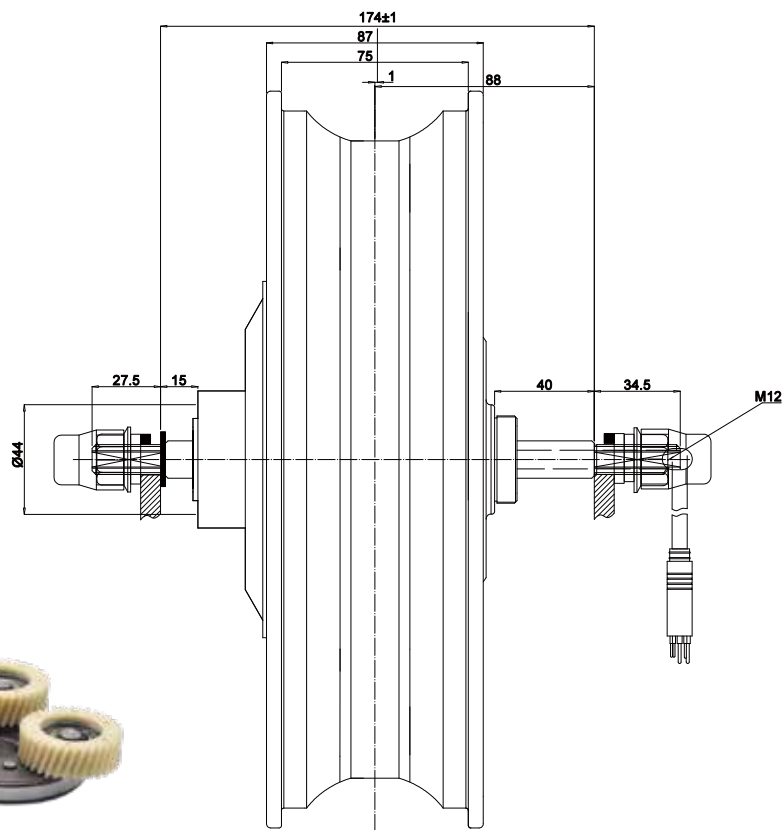

Position 安装位置	Rear	Dropout(mm)开档	175
Construction电机结构	Gear	Brake Type 刹车类型	V/Disc brake
Rated Voltage (V) 额定电压	36/48/60	Operation Temperature (℃) 工作温度	-20-45
Rated Power (W) 额定功率	250-750	Efficiency (%) 效率	≥82
Weight (Kg) 重量	6	Color颜色	Black//Shining/Silver
Reduction Ratio减速比	1:5.8	Cable Location出线方式	Shaft center right
Max Torque (N.m) 最大扭矩	80	Noise Grade (dB) 噪音等级	≤55db
Wheel Diameter (Inch) 轮径	20	IP Grade 防水等级	IP65
Rated Speed (km/h) 额定速度	25-45	Salt spray Test Standard (h) 盐雾测试	24/96
		Drive and Freewheel飞轮	6-7S



Industrial Ceiling Fan Motor 工业吊扇电机 FS730/550

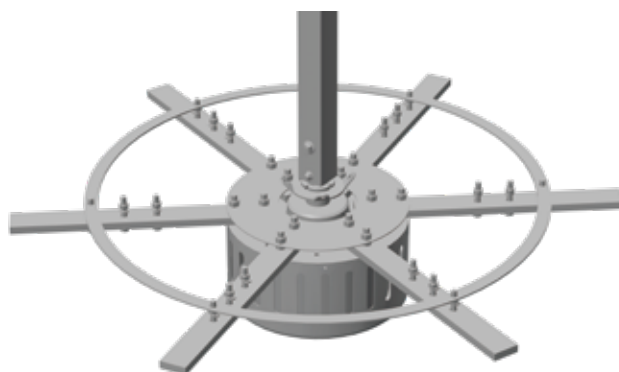

Rated Voltage (V) 额定电压	AC380V/AC220V	Air Volume (m ³) 风量	14900/10900
Rated Power (W) 额定功率	2000/1000	Coverage Area (m ²) 覆盖面积	1200/900
Weight (Kg) 重量	28	Noise Grade (dB) 噪音等级	≤ 55
Rated Torque (N.m) 额定扭矩	300	Ceiling Fan Weight (kg) 吊扇重量	95/83
Max Speed (rpm) 最高转速	55/80	Number of blades (pcs) 叶片数量	6
Max diameter of ceiling fan 风扇最大直径 (m)	8		



E-bike customized Kit



350W-500W E-bike system
E-MID



250W Torque sensor system
E-CITY



250W-1000W E-bike system
E-CITY E-ROAD E-MTB E-CARGO


NEW



350W/500W Electronic lock
E-bike system For E-FAT



Torque Sensor

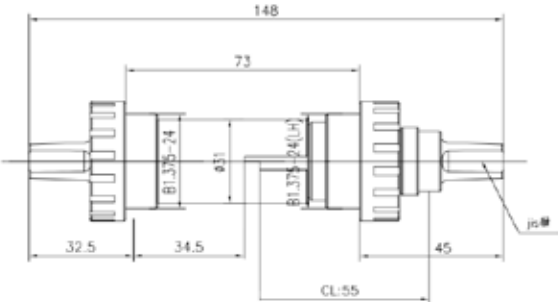image图片	
size 尺寸	
model 型号	JBHT-01
Power supply voltage 供电电压	4.5-5.5 VDC
Measuring torque signal range 测量力矩信号量程	0.5~80N.m
Number of output speed signal pulses 输出速度信号脉冲数	36
Output direction signal 输出方向信号	前进:3.1VDC 后退:0VDC
Output torque signal voltage 输出力矩信号电压	0.75~3.1 VDC
Output torque resolution 输出力矩分辨率	35mV/N.m
Protection level 防护等级	IP65
Measurement accuracy 测量精度	3%
Working temperature 工作温度	(-20~+60) ° C
Storage temperature 保存温度	(-20~+60) ° C

*New products or other products, please check our website
and contact our sales.*



EBIKE REPAIR STAND 全自动修车架



Rated Voltage 额定电压	110V
Jaw Height 钳口高度	70mm
Clamp capacity 加持能力	Round pipes and aviation pipes with widths ranging from 30mm (1.18 inches) to 72mm (2.84 inches) 宽度为 30mm(1.18inch)至 72mm(2.84inch)的圆形管和航空管
Clamp height 夹具高度	The height can be adjusted within a range of 32 可通过电动马达在32 厘米(16inch)至 210厘米(82.67inch)范围内调节
Total height 带底座和附件杆的全高	22458mm/96.77inch
Max load for single 最大承重	Single 单边65kg/143lbs
Total weight 总重	94kg/205lbs